GRINDLAZER®

Graco's Complete Line of Professional Scarifier Systems

EUROPE, MIDDLE EAST & AFRICA



PROVEN QUALITY. LEADING TECHNOLOGY.

MADE IN THE USA WITH GLOBAL COMPONENTS

THERE IS NOTHING LIKE A GRACO SCARIFYING SYSTEM

Experienced contractors know the difference. Graco GrindLazer professional scarifying solutions are recognized as solid investments that perform reliably, year after year.

TRUST YOUR BUSINESS AND REPUTATION TO GRACO

Graco is committed to providing the highest quality scarifying equipment available, backed by the industry's best warranty.

AMERICAN BUILT QUALITY

Graco professional scarifying solutions are designed, manufactured, and assembled in the USA with global components.

INDUSTRY-LEADING WARRANTY

Behind every Graco sprayer is the industry's strongest warranty. You may never use Graco's warranty—but if you do, we will be there.



GRACO-ONLY SOLUTIONS TO IMPROVE YOUR PRODUCTIVITY

DEPTH CONTROL SYSTEM™

ELIMINATE MEASURING AND GUESSWORK

- Quickly and easily adjust the cutter depth to align with the ever-changing terrain
- Achieve accurate cut depth for tape or thermoplastic inlay

ULTIMATE CONTROL AND FLEXIBILITY

- Set "zero point" where cutter meets the surface
- Displays "active depth" from zero point
- Eliminates damage due to "dropped drums"
- English and metric units

DURABLE CONTROL DESIGN

- All electronic components are 100% encapsulated—protecting them from vibration and weather conditions
- Push buttons are completely sealed
- Aluminum control enclosure holds up to harsh jobsite environment



QUIKCUT™ PCD DIAMOND CUTTERS PATENT PENDING

- Revolutionary solution for surface prep and coating removal applications
- Last >30X longer than traditional carbide cutters
- Remove up to 4X faster than traditional diamond blades
- Engineered to deliver an extremely consistent profile across the cut path over the life of the cutter
- Patent-pending design allows you to replace individual cutters—saving you time and money

MADE IN THE USA WITH GLOBAL COMPONENTS

UNLOCK BREAKTHROUGH REMOVAL PERFORMANCE

Graco continues to revolutionize surface preparation and removal applications with our QuikCut PCD Diamond Cutters. When paired with a Graco GrindLazer scarifier, these proprietary cutters enable you to tackle tough removal jobs in a fraction of the time of traditional surface prep methods.



THE QUIKCUT PCD ADVANTAGE

- ☑ *CUTS 4X FASTER THAN DIAMOND BLADE DRUMS*
- ☑ *LASTS >30X LONGER THAN TRADITIONAL CARBIDE CUTTERS*
- ☑ *SHAVES THE SURFACE TO DELIVER A CONSISTENT PROFILE*
- ☑ *REPLACEABLE CUTTER DESIGN SAVES TIME AND MONEY*
- ☑ *THREE PROFILES TO SERVE A WIDE RANGE OF APPLICATIONS*





**See operation manual online at graco.com*

PERFECT PROFILES

Graco QuikCut PCD Diamond cutters are available in three profiles to serve a wide range of surface preparation and removal applications

- *PAVEMENT MARKING REMOVAL*
- *TRIP HAZARD REMOVAL*
- *CONCRETE LEVELING*
- *FLOOR COATING REMOVAL*

QuikCut PCD Flat





Creates flat profile that's ideal for traffic paint and thin coatings

QuikCut PCD Fine





Creates light profile that provides increased adhesion for durable traffic markings and floor coatings

QuikCut PCD Coarse





Creates coarse profile that's ideal for thick coatings and aggressive removal

INDUSTRY-PROVEN GRACO SCARIFYING SOLUTIONS

Graco offers an expanded line of GrindLazers and cutters that provide the right solutions for all of your scarifier applications.

CHOOSE THE RIGHT SERIES FOR YOUR BUSINESS

Graco is committed to professional scarifying contractors by offering four different series of scarifying solutions.



graco.com/grinding

SERIES	APPLICATION	PRODUCTION RATE	DRUM STYLE MODELS	ROTARY STYLE MODELS	DRUM STYLE CUTTERS	ROTARY STYLE CUTTERS
HANDHELD SERIES	Touch-ups, edging, and removal in hard to reach areas	10 m^2/hr (100 ft^2/hr)	Standard DC21 E	Standard RC71 E	Carbide Flail	Carbide Flail
STANDARD SERIES	Basic surface prep, repairs, and line removal	30 - 40 m^2/hr (300 - 400 ft^2/hr)	Standard DC87 G Standard DC89 G		Wire Brush Steel Beam Carbide Flail Carbide Flat Carbide-Tipped Miller QuikCut PCD	
PROFESSIONAL SERIES	All surface prep, repairs, and line removal needs; use rotary model for marking removal without leaving grooves	55 - 75 m^2/hr (600 - 800 ft^2/hr)	Pro DC1013 G	Pro RC813 G Pro RC813 G DCS	Wire Brush Steel Beam Carbide Flail Carbide Flat Carbide-Tipped Miller Diamond Blade QuikCut PCD	Wire Brush Carbide Pin Carbide Pick
HIGH PRODUCTION SERIES	High production removal jobs including leveling, and inlay, and all surface coatings	120 - 325 m^2/hr (1,300 - 3,500 ft^2/hr)	HP DC89 G HP DC1013 G HP DC1021 G HP DC1013 G DCS HP DC1021 G DCS HP DC1520 E DCS HP DC1538 G DCS	HP RC820 H HP RC1625 G HP RC1640 H		



SURFACE PREPARATION

Proper coating adhesion requires proper surface preparation. It is critical to remove all surface contaminants to leave the surface clean, dry, properly profiled, and sound.

Graco offers a full range of scarifiers and cutters to create the correct surface profile (SP) while leaving the surface looking untouched, guaranteeing good coating adhesion.

CONCRETE

SP1	SP2	SP3	SP4	SP5	SP6	SP7	SP8	SP9	SP10

ASPHALT

SP1	SP2	SP3	SP4	SP5	SP6	SP7	SP8	SP9	SP10

DRUM STYLE CUTTERS

	CONCRETE												
	DIRT/DEBRIS REMOVAL	GREASE/OIL REMOVAL	CURING COMPOUND	PAINT REMOVAL	EPOXY/2K PAINT REMOVAL	THERMOPLASTIC REMOVAL	TAPE REMOVAL	TRIP HAZARD REMOVAL	SURFACE LEVELING	ANTI-SLIP GROOVING	INLAY - THERMOPLASTIC	INLAY - TAPE
WIRE BRUSH	■	■	■									
STEEL BEAM		■	■	■								
CARBIDE FLAIL				■	■			■	■	■		
CARBIDE FLAT				■	■	■						
CARBIDE-TIPPED MILLER					■	■	■					
DIAMOND BLADE									■	■	■	■
QUIKCUT PCD FLAT				■	■	■	■	■	■		■	
QUIKCUT PCD FINE				■	■	■	■	■	■		■	
QUIKCUT PCD COARSE				■	■	■	■	■	■	■	■	

	ASPHALT										
	DIRT/DEBRIS REMOVAL	GREASE/OIL REMOVAL	PAINT REMOVAL	EPOXY/2K PAINT REMOVAL	THERMOPLASTIC REMOVAL	TAPE REMOVAL	TRIP HAZARD REMOVAL	SURFACE LEVELING	ANTI-SLIP GROOVING	INLAY - THERMOPLASTIC	INLAY - TAPE
WIRE BRUSH	■	■									
STEEL BEAM		■	■	■							
CARBIDE FLAIL			■	■			■	■	■		
CARBIDE FLAT			■	■	■						
CARBIDE-TIPPED MILLER				■	■	■					
DIAMOND BLADE								■	■	■	■
QUIKCUT PCD FLAT			■	■	■	■	■	■		■	
QUIKCUT PCD FINE			■	■	■	■	■	■		■	
QUIKCUT PCD COARSE			■	■	■	■	■	■	■	■	

	SURFACE PROFILE									
	SP1 (10-30 MILS)	SP2 (30-35 MILS)	SP3 (35-40 MILS)	SP4 (40-60 MILS)	SP5 (60-80 MILS)	SP6 (80-120 MILS)	SP7 (120-160 MILS)	SP8 (160-200 MILS)	SP9 (200-240 MILS)	SP10 (240-280 MILS)
WIRE BRUSH	F									
STEEL BEAM		F / M								
CARBIDE FLAIL					F / M / C					
CARBIDE FLAT				F / M / C						
CARBIDE-TIPPED MILLER			F / M / C							
DIAMOND BLADE	F / M									
QUIKCUT PCD FLAT		F								
QUIKCUT PCD FINE			M							
QUIKCUT PCD COARSE					C					

ROTARY STYLE CUTTERS

	CONCRETE												
	DIRT/DEBRIS REMOVAL	GREASE/OIL REMOVAL	CURING COMPOUND	PAINT REMOVAL	EPOXY/2K PAINT REMOVAL	THERMOPLASTIC REMOVAL	TAPE REMOVAL	TRIP HAZARD REMOVAL	SURFACE LEVELING	ANTI-SLIP GROOVING	INLAY - THERMOPLASTIC	INLAY - TAPE
WIRE BRUSH	■	■	■									
CARBIDE PIN 72				■	■	■						
CARBIDE PIN 48				■	■	■	■					
CARBIDE PIN 24				■	■	■	■					
CARBIDE PICK					■	■						

	ASPHALT										
	DIRT/DEBRIS REMOVAL	GREASE/OIL REMOVAL	PAINT REMOVAL	EPOXY/2K PAINT REMOVAL	THERMOPLASTIC REMOVAL	TAPE REMOVAL	TRIP HAZARD REMOVAL	SURFACE LEVELING	ANTI-SLIP GROOVING	INLAY - THERMOPLASTIC	INLAY - TAPE
WIRE BRUSH	■	■									
CARBIDE PIN 72			■	■	■						
CARBIDE PIN 48			■	■	■	■					
CARBIDE PIN 24			■	■	■	■					
CARBIDE PICK				■	■						

	SURFACE PROFILE									
	SP1 (10-30 MILS)	SP2 (30-35 MILS)	SP3 (35-40 MILS)	SP4 (40-60 MILS)	SP5 (60-80 MILS)	SP6 (80-120 MILS)	SP7 (120-160 MILS)	SP8 (160-200 MILS)	SP9 (200-240 MILS)	SP10 (240-280 MILS)
WIRE BRUSH	F									
CARBIDE PIN 72				F						
CARBIDE PIN 48					M					
CARBIDE PIN 24						C				
CARBIDE PICK		F / M								

■ **BEST CUTTER CHOICE**

■ **SUITABLE CUTTER CHOICE**



GRINDLAZER HANDHELD SERIES

DC21 E AND RC71 E

The GrindLazer Standard DC21 E and Standard RC71 E are great choices for those small surface preparation jobs. Rugged, compact design makes removal of paint on horizontal and vertical surfaces quick and easy. Available in both drum (DC21 E) and rotary (RC71 E) styles.

LONG LIFE ON THE MOST CHALLENGING JOBS

- Steel and high-impact plastic construction
- Proven Makita® motor and drive

COMFORT AND FLEXIBILITY

- Reversible handle accommodates right- or left-handed users (available on DC21 E only)

MAINTENANCE-FREE DESIGN

- Sealed bearings for extended life and ease of us

DUST REMOVAL

- Vacuum port for vacuum system







HANDHELD SERIES GRINDLAZERS	PART #
DC21 E w/ Carbide Flail Cutter	25N391
RC71 E w/ Carbide Flail Cutter	25N392

GRINDLAZER STANDARD SERIES

DC87 G AND DC89 G

The GrindLazer Standard DC87 G (6.5 HP) and DC89 G (9.0 HP) Series scarifiers are great options for those smaller traffic marking removal jobs, trip hazard removal, and for preparing a surface before applying new traffic markings.

JOBSITE TOUGH DESIGN

Heavy-Duty All-Steel Frame

CONTRACTOR-PREFERRED POWER

Durable 200 cm³ (6.5 HP) or 270 cm³ (9 HP) Honda® Power with Cyclone™ Filter

- Cyclone filter protects the engine from harmful airborne dust

EASY MICRO AND MACRO ADJUSTMENTS

Dual Depth Control

- Multi-position lever and rotating knob controls

REDUCED VIBRATION FOR ALL-DAY COMFORT

Comfort Grip Handles

USER-FRIENDLY OPERATION

- Adjustable handlebar to fit different operators
- Easy-to-reach throttle control

BUILT-IN APPLICATION FLEXIBILITY

Swivel and Fixed Front Wheel

- Swivel Wheel for feathering applications
- Fixed Wheel for straight line removal

MAINTENANCE-FREE DESIGN

Sealed Main Bearing

- Long life and ease of use

DURABLE HIGH-TORQUE POWER TRANSFER

Triple Drive Belts

DUST REMOVAL

- Vacuum port for vacuum system

EASY-TO-READ GAUGES

Dual Purpose Tachometer and Hour Meter

- Ideal for maintenance — ensuring your equipment is in top shape
- Displays engine RPMs while running



Standard DC89 G shown

STANDARD SERIES GRINDLAZERS	PART #
DC87 G (bare)	25M842
DC89 G (bare)	25M843

STANDARD SERIES ACCESSORIES	PART #
Dust Suppression Water Kit	25N367
Edger Kit	25M933

GRINDLAZER PROFESSIONAL SERIES

PRO DC1013 G

The GrindLazer Pro DC1013 G is a high-output drum-style cutting options with a 390 cm^3 (13 HP) Honda engine, 25 cm (10 in) maximum cut width, and larger selection of cutters for marking removal, leveling and, surface preparation.



Pro DC1013 G shown

POWERED by HONDA

FEATURES FOUND ON ALL PROFESSIONAL SERIES SCARIFIERS

JOBSITE TOUGH DESIGN

Heavy-Duty All-Steel Frame

CONTRACTOR-PREFERRED POWER

Durable 390 cm^3 (13 HP) Honda Power with Cyclone Filter

- Cyclone filter protects the engine from harmful airborne dust

EFFICIENT "NO-BOUNCE" CUTTING

Center-Weight Design

- Better control for a better quality cut

EASY CUTTER DEPTH CONTROL

DialDown™ Depth Control System

- Easy to "dial down" for precise cutting depth control

ACCURATE CUTS AND LONG LIFE

- Precision All-Steel Wheel Assemblies

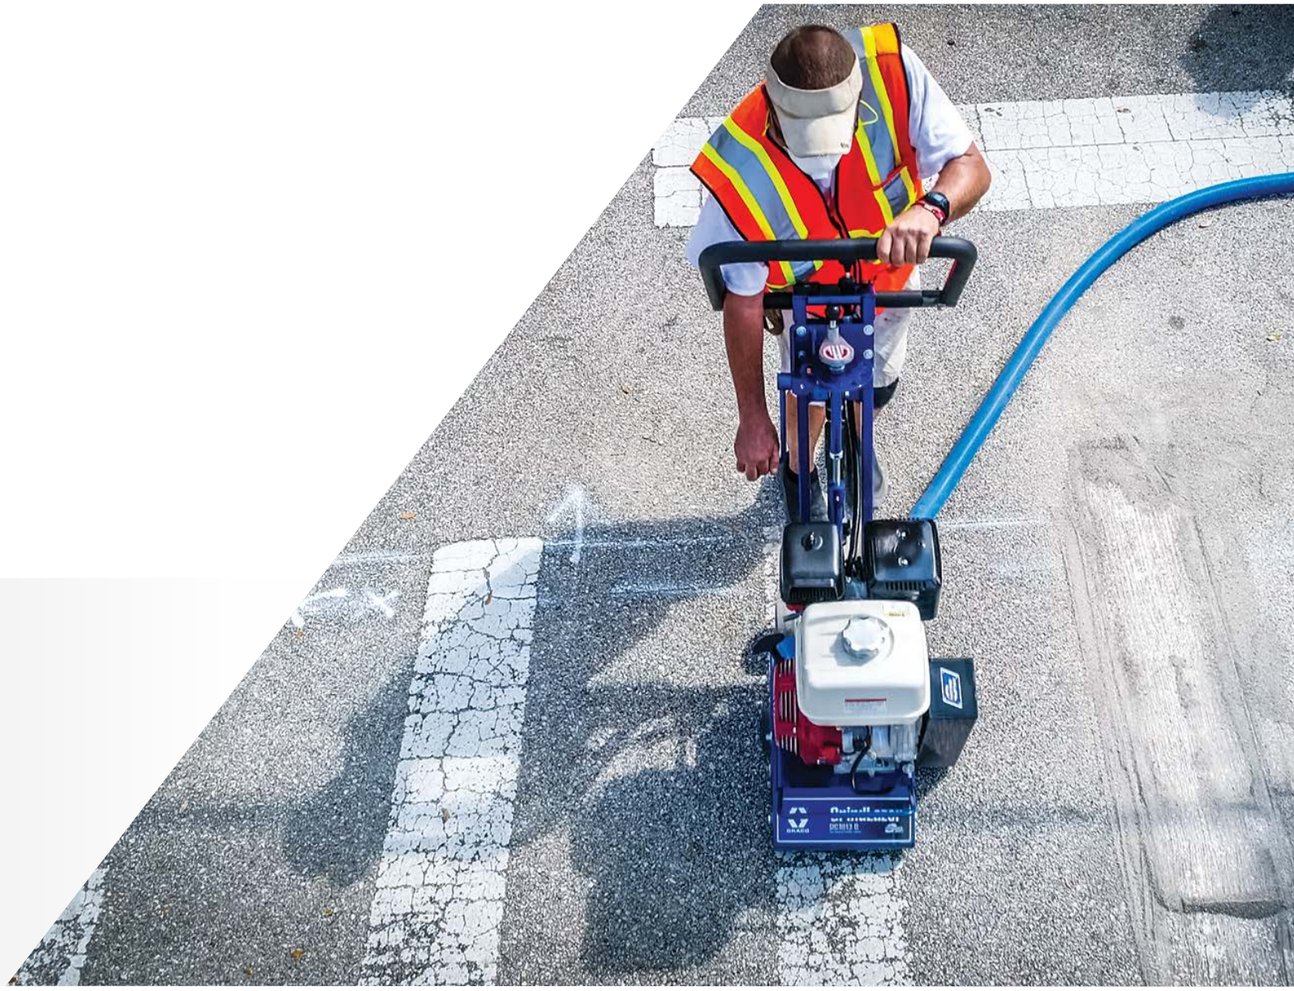

PROFESSIONAL SERIES GRINDLAZERS	PART #
PRO DC1013 G (bare)	25M846

PROFESSIONAL SERIES ACCESSORIES	PART #
Dust Suppression Water Kit	25N368
High Speed Pulley Kit (for inlay applications w/Diamond Drum only)	25M893
Edger Kit	25M951

GRINDLAZER PROFESSIONAL SERIES

PRO RC813 G

The GrindLazer Pro RC813 G is the ideal choice for when you need to remove lines without grooves. The rotary action of this scarifier hovers over the surface, resulting in line removal without leaving any ghost lines — making this the No-Groove Line Eraser.





Pro RC813 G shown

POWERED by HONDA

FEATURES FOUND ON ALL PROFESSIONAL ROTARY SCARIFIERS

NO GHOST LINES

No-Groove Line Eraser

- Rotary cut removes lines without leaving any grooves

CONTRACTOR-PREFERRED POWER

Durable 390 cm³ (13 HP) vertical Honda Power with Electric Start

- Easy starting with the push of a button — even in cold weather

JOBSITE TOUGH DESIGN

Heavy-Duty All-Steel Frame

ULTIMATE "NO DAMAGE" CONTROL

Advanced Depth-Control System

- Independent adjustment for pitch, depth, and pressure

PROFESSIONAL SERIES GRINDLAZER	PART #
PRO RC813 G (bare)	25M847

PROFESSIONAL SERIES ACCESSORIES	PART #
Dust Suppression Water Kit	25N368
High Speed Pulley Kit (for inlay applications w/Diamond Drum only)	25M893
Edger Kit	25M951

GRINDLAZER PROFESSIONAL SERIES

PRO RC813 G DCS

The GrindLazer Pro RC813 G DCS has the added benefit of a Depth Control System — increasing your accuracy and reducing fatigue.



Pro RC813 G DCS shown

POWERED by HONDA



ELIMINATE MEASURING AND GUESSWORK

GrindLazer Depth Control System

- Quickly and easily adjust the cutter depth to align with ever-changing terrain
- Eliminates damage due to "dropped cutters"

ULTIMATE CONTROL AND APPLICATION FLEXIBILITY

DCS Controller

- Set "zero point" where cutter meets surface
- Displays "active depth" from zero point
- English and metric units
- Robust design stands up the harsh abuse
  - Fully encapsulated electronic components
  - Ultimate protection from vibration, jobsite, and weather conditions

TOTAL OPERATOR CONTROL

Remote Momentary Switch

- Control cut depth while keeping both hands on the GrindLazer

JOBSITE TOUGH

Linear Actuator

- Robust linear motor stands up to highly abusive environments



QUICK CUTTER REMOVAL

Tilt-Up Chassis

- Toolless design for quick, easy cutter change-out

ALL-DAY COMFORT

Adjustable, Anti-Vibration Handle Bars

- Padded and adjustable for all users

DUST REMOVAL

- Vacuum port for vacuum system

MAINTENANCE-FREE DESIGN

Sealed Bearings

- Maintenance-free design fo long life and ease of use

EASY-TO-READ GAUGES

Dual Purpose Tachometer and Hour Meter

- Ideal for maintenance — ensuring your equipment is in top shape
- Displays engine RPMs while running

PROFESSIONAL SERIES GRINDLAZER	PART #
PRO RC813 G DCS (bare)	25N669

GRINDLAZER HIGH PRODUCTION SERIES

HP DC89 G AND HP DC1013 G

The GrindLazer HP DC89 G and HP DC1013 G provide high production, general line removal. With 270 cm^3 (9 HP) or 390 cm^3 (13 HP) Honda engines, 20 cm or 25 cm (8 in or 10 in) maximum cut widths, and larger selection of cutters, the rugged, innovative designs mean you can count on either to perform for a lifetime of use. The EasyGlide™ Wheel Mount System allows either to be used with a LineDriver® as well.





DOUBLE YOUR PRODUCTIVITY
Add a LineDriver for unmatched performance



HP DC89 G shown

FEATURES FOUND ON ALL HIGH PRODUCTION SERIES

MAXIMUM ROAD HANDLING

TriBelt™ Drive System

- 3-cog belt design optimizes power transfer and eliminates costly downtime

FAST, EASY TURNING

Fat Track™ Front Swivel Wheel

- Proven front caster wheel system makes turning fast and easy
- Maneuver curves better
- No need to “muscle it” while moving

SAFER, EASIER TO MANEUVER

EasyGlide Wheel Mount System

- Front-mounted caster alon with dual rear pneumatic air-filled tires
- Pneumatic air-filled tires help eliminate vibration

SAFER OPERATION

Extreme-Duty ProStart™ System

- Easy cutter start/stop with centrifugal clutch
- Easy cold-weather starting
- Provides longer belt life and eliminates broken recoils

HIGH PRODUCTION SERIES GRINDLAZERS	PART #
HP DC89 G (bare)	25M992
HP DC1013 G (bare)	25M993

HP SERIES ACCESSORIES	PART #
Dust Suppression Water Kit	25N367
Retractable Line Pointer Guide	24D984

HIGH PRODUCTION SERIES

GRINDLAZER HIGH PRODUCTION SERIES

HP DC1013 G DCS

The GrindLazer HP DC1013 G DCS has the added benefit of a Depth Control System and Electric Start — increasing your accuracy and reducing fatigue.



HP DC1013 G DCS shown

ELIMINATE MEASURING AND GUESSWORK

GrindLazer Depth Control System

- Quickly and easily adjust the cutter depth to align with ever-changing terrain
- Eliminates damage due to dropped drums

ULTIMATE CONTROL AND APPLICATION FLEXIBILITY

DCS Controller

- Set “zero point” where cutter meets surface
- Displays “active depth” from zero point
- English and metric units
- Robust design stands up the harsh abuse:
  - Fully encapsulated electronic components
  - Ultimate protection from vibration, jobsite, and weather conditions

TOTAL OPERATOR CONTROL

Remote Momentary Switch

- Control cut depth while keeping both hands on the GrindLazer

REDUCED FATIGUE

Electric Start on all DCS units

- Simple start-up with the turn of a key

EASY CUTTER DEPTH CONTROL

DialDown Depth Control System

- Easy to “dial down” for precise cutting depth control with multiple positions

ALL-DAY COMFORT

Vibration Reduction Technology

- Up to 4X less vibration than the competition
- Pneumatic air-filled tires, comfort grips, and cart design combine to eliminate vibration, reducing user fatigue
- Comfort-grip handlebars for precise steering

ULTIMATE REMOVAL

InstaCut Technology

- Only unit to offer hands-on” engagement of the cutting deck system for up or down position
- Allows deck to “float” when on uneven surfaces
- No-tool system

DUST REMOVAL

- Vacuum port for vacuum system

HIGH PRODUCTION SERIES GRINDLAZER	PART #
HP DC1013 G DCS (bare)	25N658

GRINDLAZER HIGH PRODUCTION SERIES

HP DC1021 G

The GrindLazer HP DC1021 G is the high production choice when it comes to the most demanding scarifier jobs. Its “Up-Cut” cutting direction allows you to remove all types of lines found on parking lots or roadways while having the power for inlay/grooving jobs.





LINEDRIVER REQUIRED

GrindLazer HP DC1021 G with Reverse/“Up-Cut” cutting direction requires the use of a LineDriver Propel System.



HP DC1021 G shown

FEATURES FOUND ON ALL HIGH PRODUCTION SERIES SCARIFIERS

MAXIMUM ROAD HANDLING

TriBelt Drive System

- 3-cog belt design optimizes power transfer and eliminates costly downtime

FAST, EASY TURNING

Fat Track Front Swivel Wheel

- Proven front caster wheel system makes turning fast and easy
- Maneuver curves better
- No need to “muscle it” while moving

SAFER, EASIER TO MANEUVER

EasyGlide Wheel Mount System

- Front-mounted caster along with dual rear pneumatic air-filled tires
- Pneumatic air-filled tires help eliminate vibration

SAFER OPERATION

Extreme-Duty ProStart System

- Easy cutter start/stop with centrifugal clutch is one of the safest units on the market today
- Easy cold-weather starting with the turn of a key

HIGH PRODUCTION SERIES GRINDLAZER	PART #
HP DC1021 G (bare)	25M994

HP SERIES ACCESSORIES	PART #
Dust Suppression Water Kit	25N367
Retractable Line Pointer Guide	24D984

GRINDLAZER HIGH PRODUCTION SERIES

HP DC1021 G DCS

The GrindLazer HP DC1021 G DCS has the added benefit of a Depth Control System and Electric Start — increasing your accuracy and reducing fatigue.

DEPTH CONTROL SYSTEM



ELIMINATE MEASURING AND GUESSWORK

GrindLazer Depth Control System

- Quickly and easily adjust the cutter depth to align with ever-changing terrain
- Accurate cut depth for tape or thermoplastic inlays
- Eliminates damage due to dropped drums



HP DC1021 G DCS shown

ULTIMATE CONTROL AND APPLICATION FLEXIBILITY

DCS Controller

- Set “zero point” where cutter meets surface
- Displays “active depth” from zero point
- English and metric units
- Robust design stands up the harsh abuse:
- Fully encapsulated electronic components
- Ultimate protection from vibration, jobsite, and weather conditions

TOTAL OPERATOR CONTROL

Remote Momentary Switch

- Control cut depth while keeping both hands on the GrindLazer, even while seated on the LineDriver

REDUCED FATIGUE

Electric Start on all DCS units

- Simple start-up with the turn of a key

EASY CUTTER DEPTH CONTROL

DialDown Depth Control System

- Easy to dial down for precise cutting depth control with multiple positions

ALL-DAY COMFORT

Vibration Reduction Technology

- Up to 4X less vibration than the competition
- Pneumatic air-filled tires, comfort grips, and cart design combine to eliminate vibration, reducing user fatigue
- Comfort-grip handlebars for precise steering

ULTIMATE REMOVAL OR INLAY FLEXIBILITY

InstaCut™ Technology

- Only unit to offer hands-on engagement of the cutting deck system for up or down position
- Allows deck to float when on uneven surfaces
- No-tool system

DUST REMOVAL

- Vacuum port for vacuum system

HIGH PRODUCTION SERIES GRINDLAZER	PART #
HP DC1021 G DCS (bare)	25N659

GRINDLAZER
HIGH PRODUCTION SERIES

DC1538 G AND DC1520 E DCS

The DC15 DCS series of heavy-duty, self-propelled drum scarifiers are designed to tackle the most demanding removal and surface preparation jobs. They are capable of removing a path up to 38 cm (15 in) wide and feature Graco's electronic DCS Depth Control System; allowing users to quickly and accurately adjust cut depth without stopping production. They are available in gasoline and electric-powered models to serve nearly any application.





HP DC1520 E DCS shown



HP DC1538 G DCS shown

FEATURES FOUND ON ALL HIGH PRODUCTION DC15 SCARIFIERS

DO-IT-ALL SOLUTION

- Adaptable for leveling, grooving, scarifying, and removing coatings
- Up to 38 cm (15 in) cut path
- Wide variety of cutters available
- Quick-change side plate for easier drum removal

SELF-PROPELLED

- Variable-speed hydrostatic drive allows user to dial-in the speed for each application

DESIGNED FOR THE TOUGHEST JOBS

- All-steel chassis
- Low-vibration design
- Long-life bearings

MULTIPLE POWER OPTIONS

- 38 HP Kohler® EFI Gasoline
- 20 HP, 380/480v, 3ph

DUST REMOVAL

- Vacuum port for vacuum system

HP DC1520 E DCS (ELECTRIC MODEL)	PART #
With Standard Speed Pulley Kit for Carbide Flail Drums	25R103
With High Speed Pulley Kit for Diamond/PCD Drums	25P783
HP DC1538 G DCS (GASOLINE MODEL)	
With Standard Speed Pulley Kit for Carbide Flail Drums	25R100
With High Speed Pulley Kit for Diamond/PCD Drums	25P474

HP DC15 SERIES ACCESSORIES	PART #
Outboard Wheel Kit for Leveling Machine	19B634
HIGH-SPEED CONVERSION KIT FOR USING DIAMOND OR PCD DRUMS	
For HP DC1520 E DCS (Electric Model)	25U322
For HP DC1538 G DCS (Gasoline Model)	25Y324
STANDARD-SPEED CONVERSION KIT FOR USING CARBIDE FLAIL DRUMS	
For HP DC1520 E DCS (Electric Model)	25U325
For HP DC1538 G DCS (Gasoline Model)	25U730

DEPTH CONTROL SYSTEM



ON-THE-FLY DEPTH CONTROL

Adjust Cut Depth Without Stopping Production

The days of manually adjusting cutter depth are over. Graco's electronic Depth Control System raises and lowers your cutter with the push of a button.

ELIMINATE MEASURING AND GUESSWORK

- Quickly and precisely adjust the cutter depth with the push of a button
- Achieve accurate cut depth for leveling, grooving, and inlay
- Eliminate damage due to "dropped drums"

TOTAL OPERATOR CONTROL

- Easy adjustment via control panel buttons
- Set "zero point" where the cutter meets the surface
- Adjust cut depth in 0.025 cm (0.01 in) increments
- Displays "active depth" from zero point
- English and metric units

DURABLE, MAINTENANCE-FREE DESIGN

- Aluminum control enclosure holds up to harsh jobsite environments
- All electronic components are 100% encapsulated to protect against vibration and weather
- Linear actuator is enclosed in a sealed case to resist water, dust, and debris

GRINDLAZER HIGH PRODUCTION SERIES

HP RC820 H

The GrindLazer HP RC820 H rotary scarifier is designed for high-volume marking removal. It is designed to be mounted to skid steer equipment with low-flow hydraulic systems and uses a variety of rotary cutter assemblies to remove different types of markings.

HIGH-VOLUME REMOVAL

Single Cutter Head

- Removes 20 cm (8 in) wide path
- Allows for removal on uneven surfaces

HYDRAULIC POWER

Low-Flow Hydraulic System

- Operates off most low-flo hydraulic systems



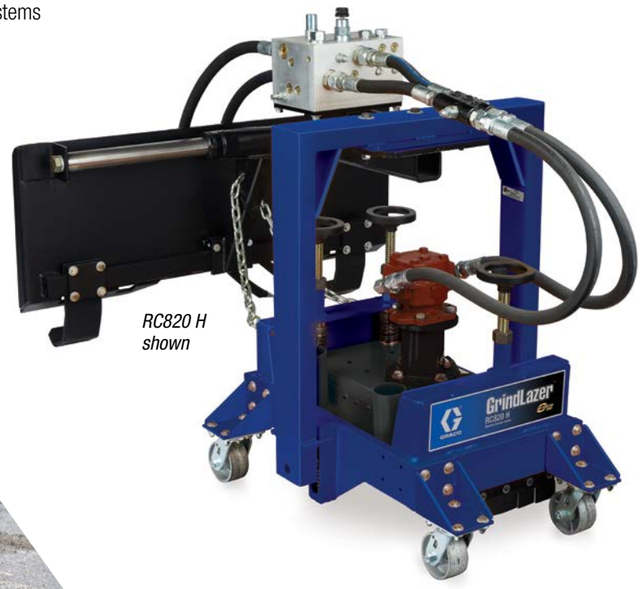

RC820 H shown

FEATURES FOUND ON ALL HIGH PRODUCTION ROTARY SCARIFIERS

NO GHOST LINES

No-Groove Line Eraser

- Rotary cut removes lines without leaving any grooves

ULTIMATE "NO DAMAGE" CONTROL

Depth Control System

- Multi-point depth adjustment for accurate depth control

Spring suspension

- Allows cutters to "float" on surface

UNIVERSAL ATTACHMENT

Bob-Tach® Quick-Attach Backplate

- Quick, tool-free connection to most skid loader equipment

JOBSITE TOUGH DESIGN

- Heavy-Duty All-Steel Frame

DUST REMOVAL

- Vacuum port for vacuum system

HIGH PRODUCTION SERIES GRINDLAZER	PART #
HP RC820 H (bare)	25P471

GRINDLAZER HIGH PRODUCTION SERIES

HP RC1640 H AND RC1625 G

The GrindLazer HP RC1640 H and HP RC1625 G rotary scarifiers offer the highest rate of groove-free marking removal and can be used to remove markings on both concrete and asphalt surfaces. These two machines use three cutter assemblies to remove a path up to 40 cm (16 in) wide. The RC1640 H operates off the vehicle's high-flow hydraulic system, while a 25HP gasoline engine powers the RC1625 G.



RC1625 G shown

ULTIMATE REMOVAL

Adjustable Cut Width

- Three cutter heads can be swiveled to remove a path up to 16 inches wide

MULTIPLE POWER OPTIONS

- High-Flow Hydraulic (HP RC1640 H)
- 25HP Kohler® Gasoline Engine (HP RC1625 G)



RC1640 H shown

HIGH PRODUCTION SERIES GRINDLAZERS	PART #
HP RC1640 H (bare)	25P472
HP RC1625 G (bare)	25P473

CUTTERS

EXPANDED LINEUP FOR ALL APPLICATIONS AND SURFACE PROFILES

Graco offers multiple types of cutters to achieve a full range of surface profiles and removal application.

DRUM STYLE CUTTERS

DRUM APPLICATIONS (9 CUTTER TYPES)

- Grooving — improving traction and preparing surfaces for coatings
- Removing coatings such as paint and thermoplastic
- Surface leveling — taking down high spots (trip hazards)
- Inlay — thermoplastic and tape

Wire Brush	Steel Beam	Carbide Flail	Carbide Flat
			
			



Car-bide-Tipped Miller	Diamond Blade	QuikCut PCD Flat	QuikCut PCD Fine	QuikCut PCD Coarse
				
				

Wire Brush	Carbide Pin 72	Carbide Pin 48	Carbide Pin 24	Carbide Pick
				
				

ROTARY STYLE CUTTERS

ROTARY APPLICATIONS (5 CUTTER TYPES)

- Paint/thermoplastic removal
- Surface preparation without grooves

GROOVE-FREE REMOVAL

Rotary cutters hover on the surface, removing lines without leaving grooves.

QUIKCUT™ PCD DIAMOND CUTTERS

Graco's QuikCut PCD Diamond Cutters are revolutionizing surface preparation and coating removal applications by using self-sharpening polycrystalline diamond technology to gently shave the surface. These cutters feature a highly-densified PCD material optimized for high-impact applications; enabling them to last over 30X longer than traditional carbide flails. An efficient drum design enables them to cut up to 2X faster than competitive PCD drums while delivering an extremely consistent profile across the cut path.

NEXT-LEVEL DURABILITY
- Highly-Densified PCD material optimized for greater durability in high-impact applications
- Lasts >30X longer than traditional carbide cutters
- Self-sharpening cutting edge maintains profile for the life of the cutter

FASTER REMOVAL
- Efficient cutter layout accelerates removal rates without compromising cut quality
- Cuts up to 2X faster than competitive PCD drums
- Cuts 4X faster than traditional diamond blades



LOWER REPLACEMENT COSTS
- Patent-pending design allows you to replace indiviual cutters — saving you time and money.

SUPERIOR PROFILE CONSISTENCY
- Engineered to deliver a consistent profile across the cut path
- Ideal for a full range of applications — including indoor flooring

QuikCut PCD Flat	QuikCut PCD Fine	QuikCut PCD Coarse
		
		
Creates flat profile that's ideal for traffic paint and thin coatings	Creates light profile that provides increased adhesion for durable traffic markings and floor coatings	Creates coarse profile that's ideal for thick coatings and aggressive removal

DIAMOND BLADES



Graco diamond drums are great for shaving, grooving, and performing inlay for traffic tape and thermoplastic. They can be setup to provide a wide variety of different groove patterns.

CARBIDE CUTTERS

Graco offers a variety of carbide cutters for nearly any application. These cutters use high-quality tungsten carbide to ensure a long service life.



Carbide Flails
- Ideal for removing paint and epoxy markings, surface leveling, and removing trip hazards



Carbide Flats
- These versatile cutters use a flat carbide pin to strip, mill, and clean concrete and asphalt surfaces



Carbide-Tipped Millers
- Millers scrape the surface to remove markings, making them a suitable choice for removing paint, epoxy, tape, and thermoplastic



Carbide Picks
- Available for drum and rotary scarifiers, carbide picks are ideal for applications requiring aggressive removal of thick coatings or material

STEEL CUTTERS

Graco offers a variety of cutters manufactured from high-quality steel. These cutters are a great for light-duty jobs such as removing oil, grease, curing compounds, or thin paint coatings. They are heat-treated for a longer service life.



Steel Beam
- Ideal for gentle removal

CARBIDE PIN ROTARY CUTTERS

These cutters are the ideal choice for removing markings without leaving grooves. A rotary scarifier floats these cutters on the surface, enabling them to chip and scratch the coating off without damaging the underlying substrate.



24 Pin
- Ideal for removing tough coatings such as thermoplastic and thick epoxy



48 Pin
- Great all-around cutter for removing thermoplastic, epoxy, or thick paint coatings



72 Pin
- Ideal for removing thin coatings such as paint

WIRE BRUSH



Wire brushes are ideal for removing curing compounds and cleaning surfaces without damaging the substrate. Graco offers wire brushes for both drum and rotary equipment.



DRUM STYLE CUTTERS



Carbide Flail



USED ON:
GRINDLAZER STANDARD DC21 E

Individual Cutter	Fully Assembled Drum	Drum Rebuild Kit
19A009		
	25M889	25M890
	25N060	25N065

Cutter Type	Profile	Cut Width	# Cutters	# Spacers	# Rods
Carbide Flail			1		
Carbide Flail	Medium	5 cm (2 in)	36	42	6
Carbide Flail	Coarse	5 cm (2 in)	30	60	6

HANDHELD DRUM COMPONENTS

Part Number	Description
17W425	Spacer - Handheld Drum
19A416	Shaft - Handheld Drum
19A417	End Plate - Handheld Drum
17W879	Bare Drum (includes Arbor, Shafts, End Plates, and Fasteners)

ROTARY STYLE CUTTERS



Carbide Flail



USED ON:
GRINDLAZER STANDARD RC71 E

Individual Cutter	Fully Assembled Drum	Drum Rebuild Kit
19A009		
	25M911	25N068

Cutter Type	Profile	Cut Width	# Cutters	# Spacers	# Rods
Carbide Flail			1		
Carbide Flail	Medium	17.5 cm (7 in)	21	21	7

HANDHELD DRUM COMPONENTS

Part Number	Description
19A414	Spacer - Handheld Rotary
17W888	Shaft - Handheld Rotary
17W889	Bare Drum (includes Arbor only)

STANDARD SERIES DRUM CUTTERS

DRUM STYLE CUTTERS



USED ON:
GRINDLAZER STANDARD DC87
GRINDLAZER STANDARD DC89

Individual Cutter	Fully Assembled Drum	Drum Rebuild Kit	Cutter Type	Profile	Cut Width	# Cutters	# Spacers	# Rods
	25M950		Wire Brush	Fine	20 cm (8 in)			
19A062			Steel Beam			1		
	25M946	25N135	Steel Beam	Fine	20 cm (8 in)	208	4	4
	25N077	25N136	Steel Beam	Fine	12.5 cm (5 in)	152	88	4
19A016			Carbide Flail 6 Pt			1		
	25N091	25N151	Carbide Flail 6 Pt	Fine	20 cm (8 in)	112	4	4
	25N092	25N152	Carbide Flail 6 Pt	Fine	12.5 cm (5 in)	76	92	4
	25M936	25N153	Carbide Flail 6 Pt	Medium	20 cm (8 in)	76	88	4
	25N093	25N154	Carbide Flail 6 Pt	Medium	12.5 cm (5 in)	52	148	4
	25N094	25N155	Carbide Flail 6 Pt	Coarse	20 cm (8 in)	64	120	4
	25N095	25N156	Carbide Flail 6 Pt	Coarse	12.5 cm (5 in)	40	176	4
19A017			Carbide Flat			1		
	25N098	25N159	Carbide Flat	Fine	20 cm (8 in)	112	8	4
		25N160	Carbide Flat	Fine	12.5 cm (5 in)	72	104	4
	25M938	25N161	Carbide Flat	Medium	20 cm (8 in)	76	88	4
		25N162	Carbide Flat	Medium	12.5 cm (5 in)	52	152	4

Wire Brush	Steel Beam	Carbide Flail	Carbide Flat	Car-bide-Tipped Miller	QuikCut PCD Flat	Quikcut PCD Fine	Quikcut PCD Coarse
							
							

Individual Cutter	Fully Assembled Drum	Drum Rebuild Kit	Cutter Type	Profile	Cut Width	# Cutters	# Spacers	# Rods
19A039			Carbide-Tipped Miller			1		
	25N112	25N167	Carbide-Tipped Miller	Fine	20 cm (8 in)	28	36	4
	25N114	25N169	Carbide-Tipped Miller	Medium	20 cm (8 in)	24	68	4
	25M940	25N171	Carbide-Tipped Miller	Coarse	20 cm (8 in)	20	104	4

STANDARD SERIES DRUM COMPONENTS

Part Number	Description
17W218	Spacer - Standard Drum
17X056	Shaft - Standard Drum
17X058	End Plate - Standard Drum
17X054	Bare Drum (includes Arbor, Shafts, End Plates, and Fasteners)

QUIKCUT PCD DIAMOND CUTTERS

QuikCut PCD Flat	QuikCut PCD Fine	QuikCut PCD Coarse	Description	Cut Width	# Cutters
2001721	2001720	2003960	Drum Assembly, 8 in Cut	20 cm (8 in)	27
2003680	2003681	2004029	QuikCut PCD Diamond Cutter		
2004425			Bare Drum (No Cutters)		

DRUM STYLE CUTTERS

USED ON:
GrindLazer Pro DC1013
GrindLazer HP DC89
GrindLazer HP DC1013
GrindLazer HP DC1021



Individual Cutter	Fully Assembled Drum	Drum Rebuild Kit
	19A001	
19A058		
	25M962	25N270
	25N194	25N271
	25N195	25N272
19A013		
	25N205	25N282
	25N206	25N283
	25N207	25N284
	25N208	25N285
	25N209	25N286
	25N210	25N287
	25M952	25N288
	25N211	25N289
	25N212	25N290

Cutter Type	Profile	Cut Width	# Cutters	# Spacers	# Rods
Wire Brush	Fine	25.5 cm (10 in)			
Steel Beam			1		
Steel Beam	Fine	25.5 cm (10 in)	330	12	6
Steel Beam	Fine	20 cm (8 in)	264	90	6
Steel Beam	Fine	15 cm (6 in)	198	174	6
Carbide Flail 8 Pt			1		
Carbide Flail 8 Pt	Fine	25.5 cm (10 in)	216	12	6
Carbide Flail 8 Pt	Fine	20 cm (8 in)	168	102	6
Carbide Flail 8 Pt	Fine	15 cm (6 in)	120	192	6
Carbide Flail 8 Pt	Medium	25.5 cm (10 in)	150	133	6
Carbide Flail 8 Pt	Medium	20 cm (8 in)	126	186	6
Carbide Flail 8 Pt	Medium	15 cm (6 in)	96	234	6
Carbide Flail 8 Pt	Coarse	25.5 cm (10 in)	120	198	6
Carbide Flail 8 Pt	Coarse	20 cm (8 in)	96	234	6
Carbide Flail 8 Pt	Coarse	15 cm (6 in)	66	288	6

Wire Brush	Steel Beam	Carbide Flail	Carbide Flat	Carbide-Tipped Miller
				
				

Individual Cutter	Fully Assembled Drum	Drum Rebuild Kit
19A014		
	25N216	25N294
	25N217	25N295
		25N296
	25M954	25N297
	25N219	25N298
	25N220	25N299
	25N221	25N300
	25N222	25N301
	25N223	25N302
19A034		
	25N227	25N306
	25N228	25N307
	25N229	25N308
	25N230	25N309
	25N231	25N310
	25N232	25N311

Cutter Type	Profile	Cut Width	# Cutters	# Spacers	# Rods
Carbide Flat			1		
Carbide Flat	Fine	25.5 cm (10 in)	216	12	6
Carbide Flat	Fine	20 cm (8 in)	168	102	6
Carbide Flat	Fine	15 cm (6 in)	120	186	6
Carbide Flat	Medium	25.5 cm (10 in)	144	144	6
Carbide Flat	Medium	20 cm (8 in)	120	192	6
Carbide Flat	Medium	15 cm (6 in)	96	234	6
Carbide Flat	Coarse	25.5 cm (10 in)	108	210	6
Carbide Flat	Coarse	20 cm (8 in)	90	246	6
Carbide Flat	Coarse	15 cm (6 in)	66	294	6
Carbide-Tipped Miller			1		
Carbide-Tipped Miller	Fine	25.5 cm (10 in)	42	132	6
Carbide-Tipped Miller	Fine	20 cm (8 in)	36	174	6
Carbide-Tipped Miller	Fine	15 cm (6 in)	30	216	6
Carbide-Tipped Miller	Medium	25.5 cm (10 in)	36	174	6
Carbide-Tipped Miller	Medium	20 cm (8 in)	30	210	6
Carbide-Tipped Miller	Medium	15 cm (6 in)	24	252	6

PRO/HP DRUM COMPONENTS

Part Number	Description
19A415	Spacer - Pro/HP Drum
17W991	Shaft - Pro/HP Drum
17W983	End Plate - Pro/HP Drum
17W989	Bare Drum (includes Arbor, Shafts, End Plates, and Fasteners)

DRUM STYLE CUTTERS



Diamond BLADE	QuikCut PCD Flat	QuikCut PCD Fine	QuikCut PCD Coarse
			
			

Pro/HP Series QuikCut PCD Diamond Drums

QuikCut PCD Flat	QuikCut PCD Fine	QuikCut PCD Coarse	Description	Cut Width	# Cutters
2001725	2001724	2003962	Drum Assembly, 10 in Cut	25.5 cm (10 in)	39
2001723	2001722	2003961	Drum Assembly, 5 in Cut	12.5 cm (5 in)	21
2003680	2003681	2004029	QuikCut PCD Diamond Cutter (Single)		
2004426			Bare Drum (No Cutters)		

Pro/HP Series Diamond Blades

Part #	Description	Cut Width	# Blades	1/8 in Spacer	1/4 in Spacer	Square Key
24D583	Diamond Drum, 10 in Cut, No Spacing	25.5 cm (10 in)	38	39	2	2
24B965	Diamond Drum, 5 in Cut, No Spacing	12.5 cm (5 in)	19	21	21	2

24E289	Diamond Blade
16A259	Threaded End Plate - Diamond Drum
24D982	Mandrel - Diamond Drum
16A258	1/8 in Spacer
16A257	1/4 in Spacer
123252	Key - Diamond Drum



Diamond Blade



Diamond Drum Assembly





USED ON:
HP DC1538 G DCS
HP DC1520 E DCS

DC15 Series QuikCut PCD Diamond Drums

QuikCut PCD Flat	QuikCut PCD Fine	QuikCut PCD Coarse	Description	Cut Width	# Cutters
2001727	2001726	2003963	Drum Assembly, 15 in Cut	38 cm (15 in)	80
2003680	2003681	2004029	QuikCut PCD Diamond Cutter (Single)		
2004427			Bare Drum (No Cutters)		

*High-Speed Pulley Kit required for PCD and Diamond drums



QuikCut PCD Diamond Drum Assembly

HP DC15 Series Diamond Blades

Asphalt Blade	Concrete Blade	Description	# Blades	1/10 in Spacer	1/8 in Spacer	1/2 in Spacer
25B382	25B383	Diamond Drum, 15 in Cut, no spacing	58	0	59	2
25B384	25B385	Diamond Drum, 15 in Cut, 1/8 in spacing	43	42	44	2
19A106	19A107	Diamond Blade				

19B428	1/10 in Spacer
19B430	1/8 in Spacer
19B429	1/2 in Spacer
19B427	Bare Drum (includes Mandrel, End Plate, and Keys)

*High-Speed Pulley Kit required for PCD and Diamond drums



Diamond Blade



Diamond Drum Assembly

HP DC15 Series Carbide Flail Cutters

Fully Assembled Drum	Drum Rebuild Kits	Description	Cutter Type	# Cutters	# Spacers	# Rods
25B386	19B404	Carbide Flail Drum, 15 in Cut, Fine Profile	Carbide Flail 8 Pt	210	5	5
25B387	19B405	Carbide Flail Drum, 15 in Cut, Medium Profile	Carbide Flail 8 Pt	155	120	5
25B388	19B406	Carbide Flail Drum, 15 in Cut, Coarse Profile	Carbide Flail 8 Pt	120	200	5

19A027	Individual Cutter
19B433	Spacer
19B432	Rod
19B434	End Plate
19B431	Bare Drum (includes Arbor, Shafts, End Plates, and Fasteners

*Standard-Speed Pulley Kit required for Carbide Flail Cutters



Carbide Flail



Carbide Flail Drum Assembly

ROTARY STYLE CUTTERS



USED ON:
GrindLazer Pro RC813
GrindLazer HP RC820 H
GrindLazer HP RC1625 G
GrindLazer HP RC1640 H

Wire Brush	Carbide Pin 72	Carbide Pin 48	Carbide Pin 24	Carbide Pick
				
				

Cutters Only (Complete Set)	Cutter Assembly
25N330	25N333
19A089	25N365
19A088	25N364
19A087	25N363
25N332	25N335

Cutter Type	Profile	Cut Width
Wire Brush	Fine	20 cm (8 in)
Carbide Pin 72	Fine	20 cm (8 in)
Carbide Pin 48	Medium	20 cm (8 in)
Carbide Pin 24	Coarse	20 cm (8 in)
Carbide Pick	Medium	20 cm (8 in)



LINEDRIVER AND LINEDRIVER HD

WHY WALK WHEN YOU CAN RIDE?

Graco LineDriver attachments connect to your GrindLazer to provide the most innovative, user-friendly ride-on systems available to double your productivity.

SOLUTIONS THAT IMPROVE YOUR PRODUCTIVITY

RIDE WITH EASE

Patented Dual Foot Pedal System

- Adjustable pedals to fit every user
- Forward and reverse capability

EASY STARTING

Exclusive ProStart™ Engine Starting System (LineDriver HD w/ Honda Engine)

- Up to 50% less pulling effort to start the engine

ULTIMATE COMFORT

Cool-Comfort™ Seat

- Gray color stays cool in direct sunlight
- High-back seat for added support
- Extra padding for all-day comfort

LOW-LIGHT ACCURACY

FlexBeam™ LED Light System

- LED light for improved brightness with long life and less amp draw
- Retractable, breakaway design prevents damage and keeps you striping

RELIABLE POWER

Choose Your Engine

- Honda GX Engine
- Lithium Battery Powered Engine



LINEDRIVERS	PART #
LineDriver	262004
LineDriver HD	262005
LineDriver ES	25U671

LINEDRIVER ACCESSORIES	PART #
HITCH KIT (GRINDLAZER HP DC89 G/1013 G (DCS)/DC1021 G (DCS))	245321
HITCH KIT (GRINDLAZER PRO RC813 G)	17Z277

SPECIFICATIONS

	HANDHELD SERIES	STANDARD SERIES		PRO SERIES
				
Unit Model	**GrindLazer DC21 E**	**GrindLazer DC87 G**	**GrindLazer DC89 G**	**GrindLazer DC1013 G**
WEIGHT KG (LB)	5.5 (12)	68 (150)	73 (160)	104 (230)
CUTTER TYPE	Drum	Drum	Drum	Drum
MAX WORKING WIDTH	5 cm (2 in)	20 cm (8 in)	20 cm (8 in)	25.5 cm (10 in)
CUTTER DRUM DIAMETER	10 cm (4 in)	12.5 cm (5 in)	12.5 cm (5 in)	17.5 cm (7 in)
ENGINE/MOTOR	230V Makita	Honda 200 cm^3 (6.5 HP)	Honda 270 cm^3 (9 HP)	Honda 390 cm^3 (13 HP)
ENGINE START	N/A	Pull Start	Pull Start	Pull Start
AIR FILTER	N/A	Cyclone™	Cyclone	Cyclone
TACH/HOUR METER	NO	YES	YES	YES
MAX CUT RATE (WALK)	10 m^2/hr	30 m^2/hr	40 m^2/hr	65 m^2/hr
MAX CUT RATE (LINEDRIVER)	N/A	N/A	N/A	N/A
LINEDRIVER / SKID LOADER COMPATIBLE	NO	NO	NO	NO
VACUUM PORT	YES	YES	YES	YES
WATER CONNECTION	NO	Optional	Optional	Optional
ELECTRONIC DEPTH CONTROL SYSTEM	NO	NO	NO	NO
GRINDLAZER (BARE)	25N391	25M842	25M843	25M846
APPLICATIONS	• Touch-Ups • Edge Work • Walls	• Traffic Paint Removal • Thermoplastic Removal • Smoothing Uneven Surfaces • Coating Removal • Trip Hazard Removal		• Traffic Paint Removal • Thermoplastic Removal • Smoothing Uneven Surfaces • Epoxy Removal • Inlay Grooving (Requires High Speed Pulley Kit - 25M893)

HIGH PRODUCTION SERIES				
				
GrindLazer DC89 G	**GrindLazer DC1013 G**	**GrindLazer DC1013 G DCS**	**GrindLazer DC1021 G**	**GrindLazer DC1021 G DCS**
136 (300)	141 (310)	154 (340)	159 (350)	163 (360)
Drum	Drum	Drum	Drum, Reverse Cut	Drum, Reverse Cut
20 cm (8 in)	25.5 cm (10 in)	25.5 cm (10 in)	25.5 cm (10 in)	25.5 cm (10 in)
17.5 cm (7 in)	17.5 cm (7 in)	17.5 cm (7 in)	17.5 cm (7 in)	17.5 cm (7 in)
Honda 270 cm^3 (9 HP)	Honda 390 cm^3 (13 HP)	Honda 390 cm^3 (13 HP)	Vanguard 630 cm^3 (21 HP)	Vanguard 630 cm^3 (21 HP)
ProStart	ProStart	Electric Start	Electric Start	Electric Start
Cyclone	Cyclone	Cyclone	Donaldson® Heavy-Duty	Donaldson® Heavy-Duty
YES	YES	YES	YES	YES
55 m^2/hr	75 m^2/hr	75 m^2/hr	N/A	N/A
120 m^2/hr	155 m^2/hr	155 m^2/hr	195 m^2/hr	195 m^2/hr
Optional	Optional	Optional	Required	Required
YES	YES	YES	YES	YES
Optional	Optional	Optional	Optional	Optional
NO	NO	YES	NO	YES
25M992	25M993	25N658	25M994	25N659
• Traffic Paint Removal • Thermoplastic Removal • Smoothing Uneven Surfaces	• Traffic Paint Removal • Thermoplastic Removal • Smoothing Uneven Surfaces • Epoxy Removal		• Traffic Paint Removal • Thermoplastic Removal • Smoothing Uneven Surfaces • Epoxy Removal • Inlay Grooving	

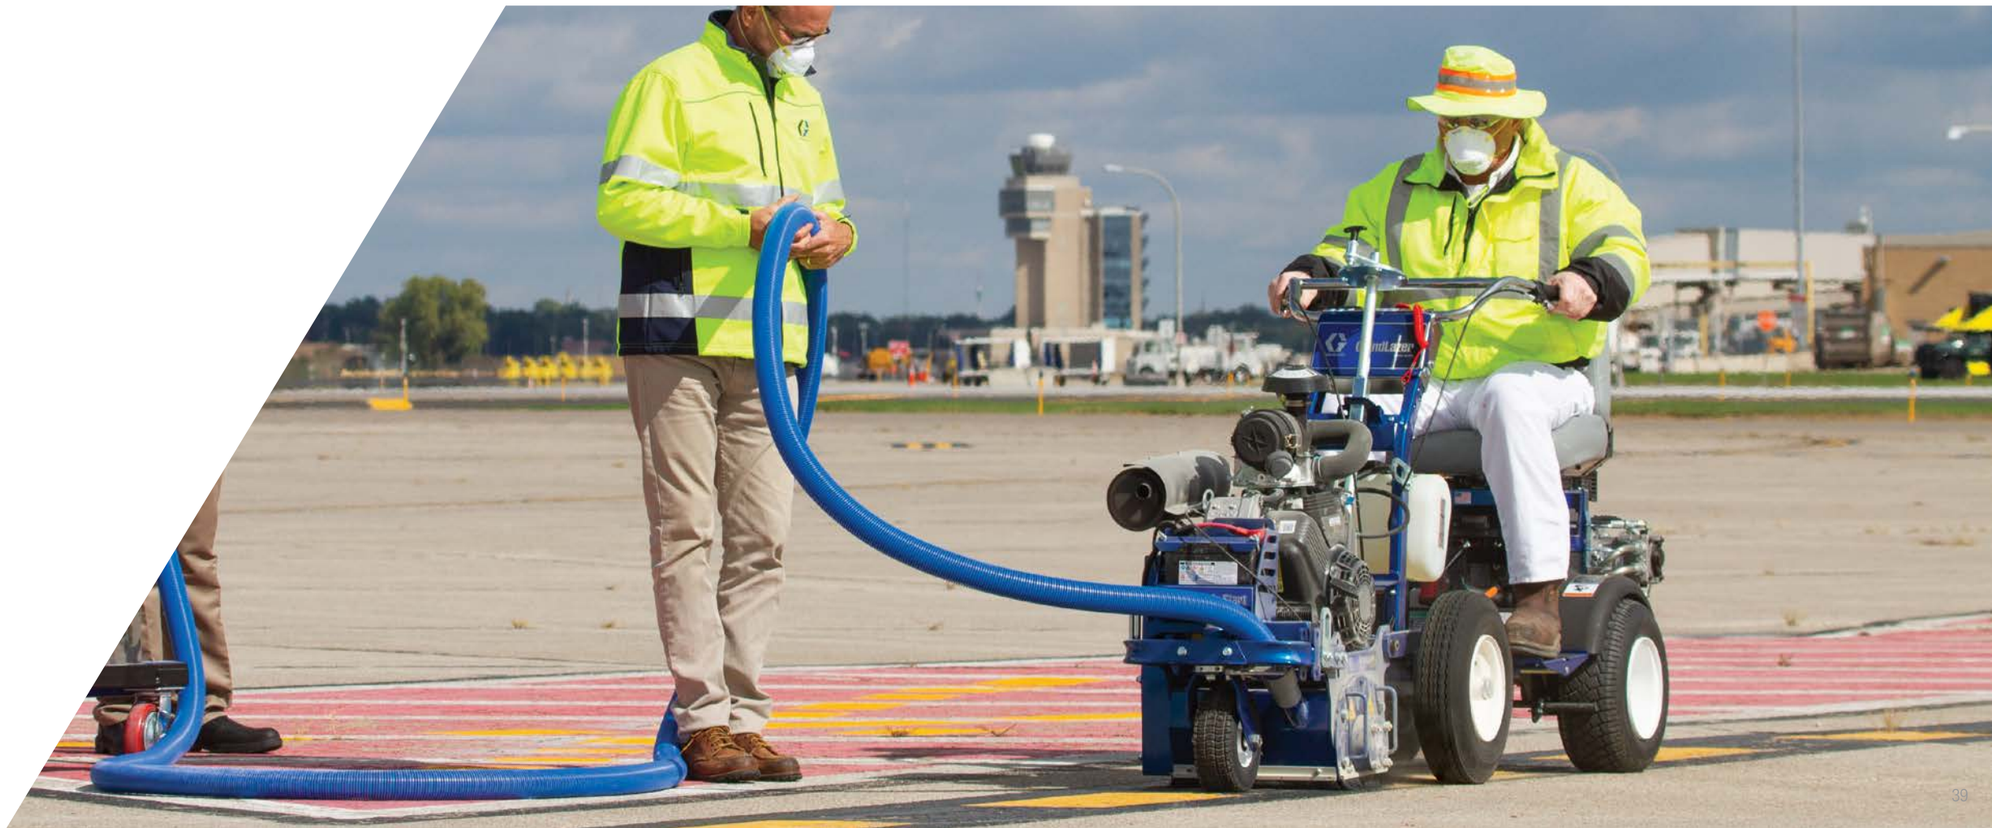

SPECIFICATIONS

	HANDHELD SERIES	PRO SERIES		HIGH PRODUCTION SERIES		
						
Unit Model	**GrindLazer RC71 E**	**GrindLazer RC813 G**	**GrindLazer RC813 G DCS**	**GRINDLAZER RC820 H**	**GRINDLAZER RC1640 H**	**GRINDLAZER RC1625 G**
WEIGHT KG (LB)	6.8 (15)	204 (450)	209 (460)	218 (480)	434 (956)	434 (956)
CUTTER TYPE	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
MAX WORKING WIDTH	17.5 cm (7 in)	20 cm (8 in)	20 cm (8 in)	20 cm (8 in)	40 cm (16 in)	40 cm (16 in)
ENGINE/MOTOR	230V Makita	Honda 390 cm^3 (13 HP)	13 HP Honda	Low-flow Hydraulic (20 HP)	High-flow Hydraulic (40 HP)	Kohler (25 HP)
ENGINE START	N/A	Electric Start	Electric Start	N/A	N/A	Electric Start
AIR FILTER	N/A	Standard	Standard	N/A	N/A	Standard
TACH/HOUR METER	NO	YES	YES	YES	YES	YES
MAX CUT RATE (WALK)	10 m^2/hr	75 m^2/hr	75 m^2/hr	N/A	N/A	N/A
MAX CUT RATE (LINEDRIVER/SKID LOADER)	N/A	N/A	N/A	95 m^2/hr	225 m^2/hr	225 m^2/hr
LINEDRIVER/SKID LOADER COMPATIBLE	NO	NO	NO	Bob-Tach® Skid Loader Connection		
VACUUM PORT	YES	YES	YES	YES	YES	YES
WATER CONNECTION	NO	NO	NO	NO	NO	NO
ELECTRONIC DEPTH CONTROL SYSTEM	NO	NO	YES	NO	NO	NO
GRINDLAZER (BARE)	25N392	25M847	25N669	25P471	25P472	25P473
APPLICATIONS	• Touch-Ups • Edge Work • Walls	• Traffic Paint Removal • Thermoplastic Removal • Surface Prep Prior to Applying Markings				

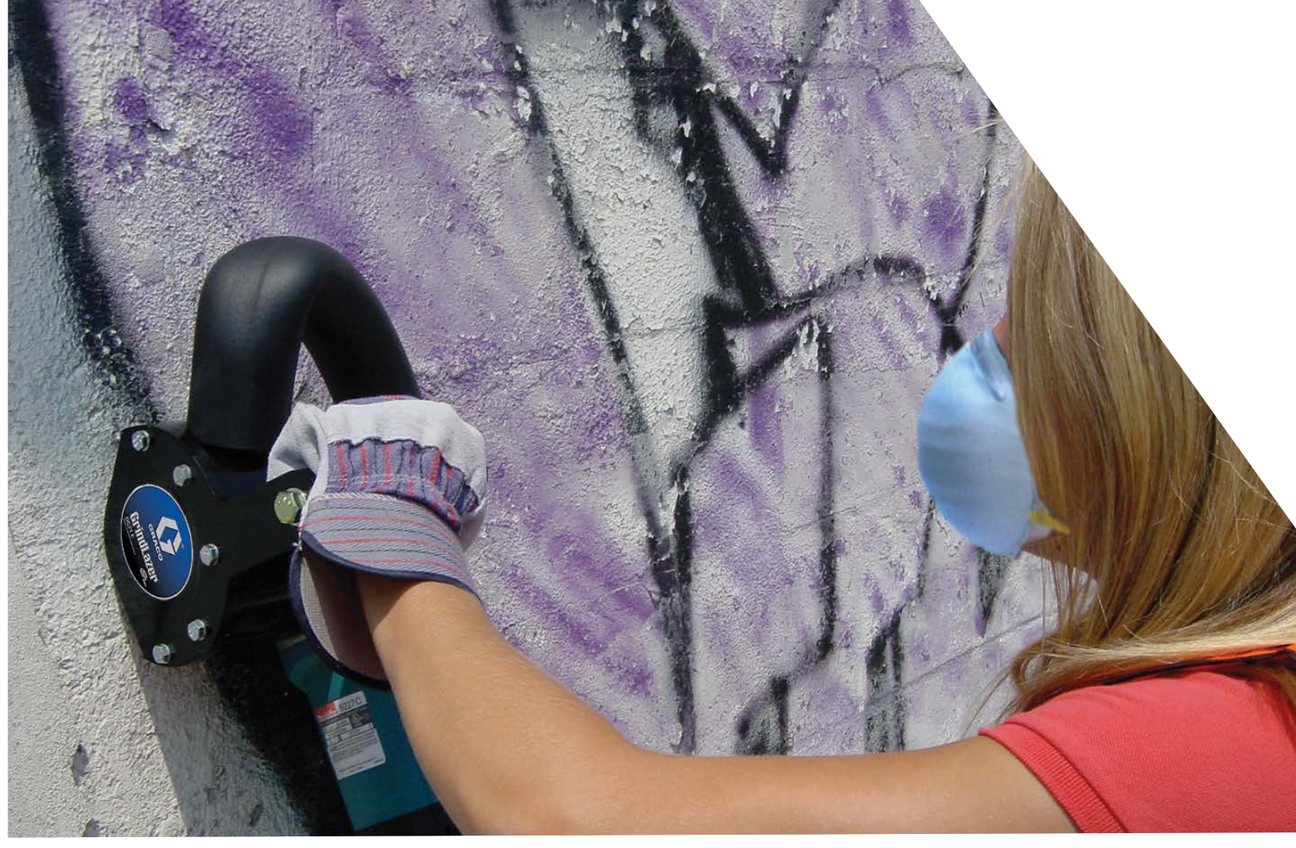





Unit Model	GrindLazer DC1538 G DCS	GrindLazer DC1520 E DCS
WEIGHT KG (LB)	329 (725)	413 (910)
CUTTER TYPE	Drum	Drum
MAX WORKING WIDTH	38 cm (15 in)	38 cm (15 in)
CUTTER DRUM DIAMETER	25.5 cm (10 in)	25.5 cm (10 in)
ENGINE/MOTOR	Kohler (38 HP)	380V (20 HP)
ENGINE START	Electric Start	N/A
AIR FILTER	Heavy-Duty	N/A
TACH/HOUR METER	YES	YES
MAX CUT RATE	325 m^2/hr	325 m^2/hr
LINEDRIVER COMPATIBLE	NO	NO
VACUUM PORTS	2	2
ELECTRONIC DEPTH CONTROL SYSTEM	YES	YES
GRINDLAZER W/ HIGH-SPEED PULLEY KIT FOR DIAMOND / PCD DRUMS	25P474	25P783
GRINDLAZER W/ STANDARD-SPEED PULLEY KIT FOR CARBIDE FLAIL DRUMS	25R100	25R103
APPLICATIONS	• Leveling Uneven Surfaces • Coating Removal • Inlay and Grooving • Removing Traffic Markings	

	LINEDRIVERS		
			
Unit Model	**LineDriver**	**LineDriver HD**	**LineDriver ES**
PART NUMBER	262004	262005	25U671
OPERATING SPEED: FORWARD KM/H (MPH) REVERSE KM/H (MPH)	to 16 (10) to 10 (6)	to 16 (10) to 10 (6)	to 16 (10) to 11 (7)
ENGINE SIZE CC (HP)	Honda 160 cm^3 (5.5 HP)	Honda 200 cm^3 (6.5 HP)	3x 24V, 5 Ah Lithium
WEIGHT KG (LB)	120 (265)	125 (275)	174 (384)
FUEL CAPACITY LITRES (GAL)	3.6 (.95)	3.6 (.95)	-
ENGINE STARTING SYSTEM	Manual Pull	ProStart	Electric Start

NOTES

OUR BRAND PROMISE TO YOU

Since 1926, **innovation**, **quality** and **A+ Service** have been at the centre of Graco.

Experience Innovation

Our focus on innovation results in products and equipment that lead the industry with technologically-advanced features, pioneering design, high performance and unparalleled reliability. In short, innovation is how you get better products!

Building Quality

You're investing in high-quality products built to last for years of reliable service. Moreover, we partner with our customers to better understand how you're deploying our products in the field, then use your experiences to improve performance and durability.

A+ service, every time

You'll see A+ Service in action when you contact any of our support services options no matter where you are in the world. We'll listen to your situation and work methodically to resolve it as quickly as we can. We are guided by a mindset of integrity and a customer service view centred on collaboration and relationships, not transactions.

We're here to answer questions and help address your needs:
www.graco.com/contact

Graco is certified ISO 9001.

©2024 Graco Distribution BV 344384ENEU-J 08/24. Printed in Europe.
All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.
All other brand names or marks are used for identification purposes and are trademarks of their respective owners. For more information on Graco's intellectual property, see www.graco.com/patent or www.graco.com/trademarks.